


L-461CS

Soap  
Dispenser  
Stainless Steel

The L-461 is a sensor operated wall mounted soap dispenser and uses a quick replenishment soap system.

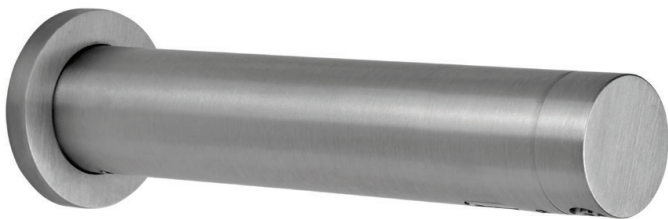

Codes

L-461

Technical Data

Finishes	CS (Satin)
Recommended soap viscosity	100-3800cPs for liquid soap only. Not for use with foam soap, alcohol gel or hand sanitizer.
Weight	0.86Kg (1lb 14oz)
Stainless steel grade	AISI 316 Stainless Steel
Power supply	6 x Type D batteries - (IP67 rated battery holder)
Warranty	12 months from date of purchase
Standard discharge	0.8cc adjustable

Optional Accessories

L0710005	Remote control settings adjuster - sensitivity
L07100008	Remote control settings adjuster - dosage
L150038	Multi-feed pump; Push fit connector
L150050	Multi-feed soap reservoir for sensor soap dispensers with top fill pipe
L150051	Multi-feed soap reservoir for sensor soap dispenser

## L-461CS      Soap Dispenser Stainless Steel

---

### Installation Requirements

---

Wall cut-out (dia)	24mm ( $\frac{15}{16}$ " )
Maximum wall thickness	50mm (2")
Fixing height	Sensor on the underside of the soap dispenser to be a minimum of 300mm ( $11\frac{13}{16}$ " ) from any surface.
Reflective surfaces	Not to be installed above highly polished basins
Access requirements	Pumps and transformers must be accessible at all times for servicing
Power supply	Dispenser is not to be installed opposite a mirror, or other highly reflective surfaces. Avoid installing directly opposite other sensor taps/soap dispensers.
Power supply (battery holder)	Within 1.2 metres of dispenser to allow connection of cable.
Distance from dispenser to reservoir	Single feed - 1 metre Multi feed - 3 metres

### Compliance

---

CE compliant  
cULus compliant

### Related Products

---

Sensor Tap                      [L-180](#)

